


MITSUBISHI ELECTRIC PHOTOVOLTAIC MODULE




SPECIFICATIONS

Manufacturer	MITSUBISHI ELECTRIC			
Model name	PV-MF130UE4N	PV-MF125UE4N	PV-MF120UE4N	PV-MF115UE4N
Cell type	Polycrystalline Silicon, 156mm x 156mm, Solder-coatingless			
Number of cells	36 cells in a series			
Maximum power rating(Pmax)	130W	125W	120W	115W
Warranted minimum Pmax	123.5W	118.8W	114W	109.3W
Open circuit voltage (Voc)	21.9V	21.8V	21.6V	21.5V
Short circuit current (Isc)	8.05A	7.9A	7.75A	7.6A
Maximum power voltage (Vmp)	17.4V	17.3V	17.2V	17.1V
Maximum power current (Imp)	7.47A	7.23A	6.99A	6.75A
Tolerance at Pmax	Nominal value +10%, -5%			
Maximum system voltage	DC 600V			
Fuse rating	15A			
Output terminal	(+) 31.5inch (800mm) / (-) 49.21inch(1250mm) with MC connector			
Dimensions	58.9x26.5x1.81inch (1495x674x46mm)			
Weight	29.8lbs,(13.5kg)			
Module efficiency	12.9%	12.4%	11.9%	11.4%
Package Contents	2 pcs - 1 carton			
Certifications	IEC 61215, UL1703			

DRAWINGS AND DIMENSIONS

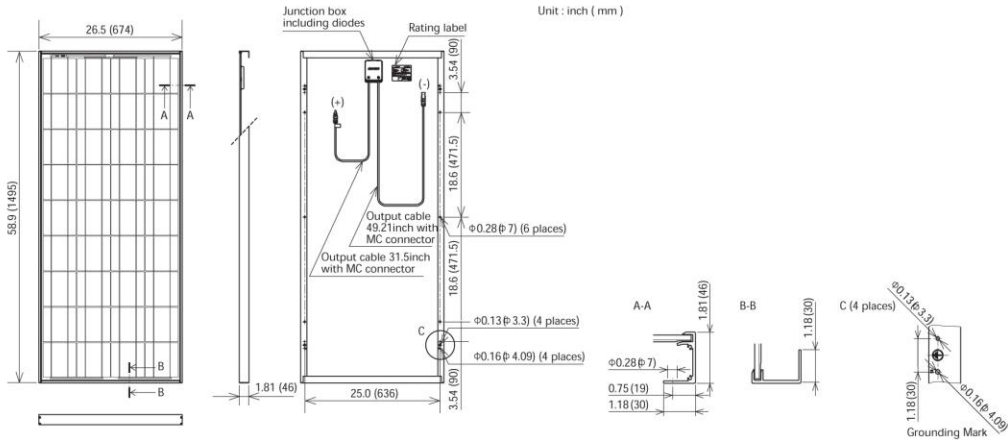

ELECTRICAL CHARACTERISTICS

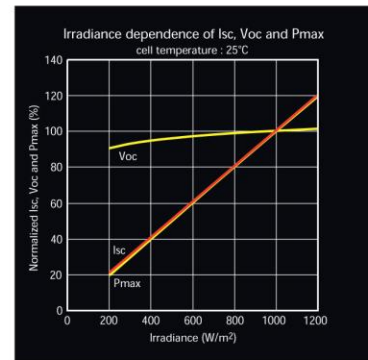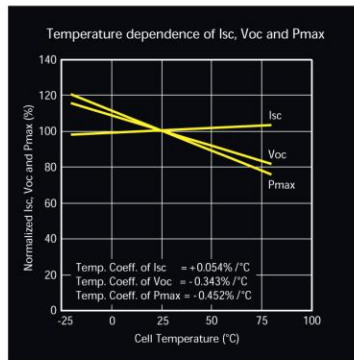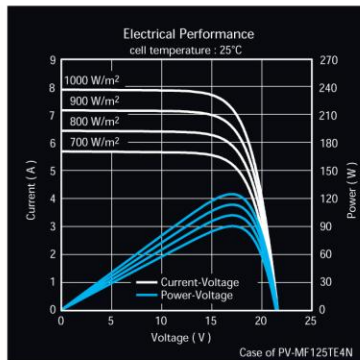

Mitsubishi Electric & Electronics USA, Inc.
5665 Plaza Drive, Cypress, CA 90630-0007
Phone: 714-229-3814 Email: pv@meus.mea.com

<http://www.MitsubishiElectric.com/products/solar.html>