


Enphase IQ 7 and IQ 7+ Microinverters

The high-powered smart grid-ready **Enphase IQ 7 Micro™** and **Enphase IQ 7+ Micro™** dramatically simplify the installation process while achieving the highest system efficiency.

Part of the Enphase IQ System, the IQ 7 and IQ 7+ Microinverters integrate with the Enphase IQ Envoy™, Enphase IQ Battery™, and the Enphase Enlighten™ monitoring and analysis software.

IQ Series Microinverters extend the reliability standards set forth by previous generations and undergo over a million hours of power-on testing, enabling Enphase to provide an industry-leading warranty of up to 25 years.

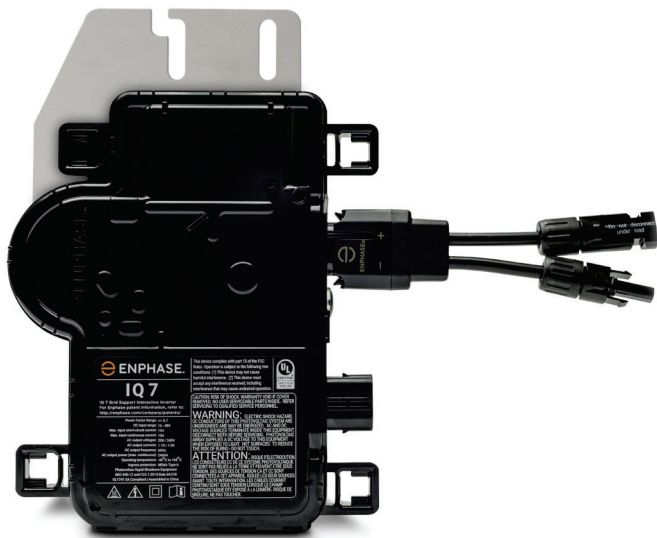

Easy to Install

- Lightweight and simple
- Faster installation with improved, lighter two-wire cabling
- Built-in rapid shutdown compliant (NEC 2014 & 2017)

Productive and Reliable

- Optimized for high powered 60-cell and 72-cell* modules
- More than a million hours of testing
- Class II double-insulated enclosure
- UL listed

Smart Grid Ready

- Complies with advanced grid support, voltage and frequency ride-through requirements
- Remotely updates to respond to changing grid requirements
- Configurable for varying grid profiles
- Meets CA Rule 21 (UL 1741-SA)

* The IQ 7+ Micro is required to support 72-cell modules.



To learn more about Enphase offerings, visit enphase.com



Enphase IQ 7 and IQ 7+ Microinverters

| INPUT DATA (DC) | IQ7-60-2-US | | IQ7PLUS-72-2-US | |
|--|--|----------------------|--------------------------------|----------------------|
| Commonly used module pairings ¹ | 235 W - 350 W + | | 235 W - 440 W + | |
| Module compatibility | 60-cell PV modules only | | 60-cell and 72-cell PV modules | |
| Maximum input DC voltage | 48 V | | 60 V | |
| Peak power tracking voltage | 27 V - 37 V | | 27 V - 45 V | |
| Operating range | 16 V - 48 V | | 16 V - 60 V | |
| Min/Max start voltage | 22 V / 48 V | | 22 V / 60 V | |
| Max DC short circuit current (module I _{sc}) | 15 A | | 15 A | |
| Overvoltage class DC port | II | | II | |
| DC port backfeed current | 0 A | | 0 A | |
| PV array configuration | 1 x 1 ungrounded array; No additional DC side protection required; AC side protection requires max 20A per branch circuit | | | |
| OUTPUT DATA (AC) | IQ 7 Microinverter | | IQ 7+ Microinverter | |
| Peak output power | 250 VA | | 295 VA | |
| Maximum continuous output power | 240 VA | | 290 VA | |
| Nominal (L-L) voltage/range ² | 240 V / 211-264 V | 208 V / 183-229 V | 240 V / 211-264 V | 208 V / 183-229 V |
| Maximum continuous output current | 1.0 A (240 V) | 1.15 A (208 V) | 1.21 A (240 V) | 1.39 A (208 V) |
| Nominal frequency | 60 Hz | | 60 Hz | |
| Extended frequency range | 47 - 68 Hz | | 47 - 68 Hz | |
| AC short circuit fault current over 3 cycles | 5.8 Arms | | 5.8 Arms | |
| Maximum units per 20 A (L-L) branch circuit ³ | 16 (240 VAC) | 13 (208 VAC) | 13 (240 VAC) | 11 (208 VAC) |
| Overvoltage class AC port | III | | III | |
| AC port backfeed current | 0 A | | 0 A | |
| Power factor setting | 1.0 | | 1.0 | |
| Power factor (adjustable) | 0.85 leading ... 0.85 lagging | | 0.85 leading ... 0.85 lagging | |
| EFFICIENCY | @240 V | @208 V | @240 V | @208 V |
| Peak efficiency | 97.6 % | 97.6 % | 97.5 % | 97.3 % |
| CEC weighted efficiency | 97.0 % | 97.0 % | 97.0 % | 97.0 % |
| MECHANICAL DATA | | | | |
| Ambient temperature range | -40°C to +65°C | | | |
| Relative humidity range | 4% to 100% (condensing) | | | |
| Connector type (IQ7-60-2-US & IQ7PLUS-72-2-US) | MC4 (or Amphenol H4 UTX with additional Q-DCC-5 adapter) | | | |
| Dimensions (WxHxD) | 212 mm x 175 mm x 30.2 mm (without bracket) | | | |
| Weight | 1.08 kg (2.38 lbs) | | | |
| Cooling | Natural convection - No fans | | | |
| Approved for wet locations | Yes | | | |
| Pollution degree | PD3 | | | |
| Enclosure | Class II double-insulated, corrosion resistant polymeric enclosure | | | |
| Environmental category / UV exposure rating | NEMA Type 6 / outdoor | | | |
| FEATURES | | | | |
| Communication | Power Line Communication (PLC) | | | |
| Monitoring | Enlighten Manager and MyEnlighten monitoring options. Both options require installation of an Enphase IQ Envoy. | | | |
| Disconnecting means | The AC and DC connectors have been evaluated and approved by UL for use as the load-break disconnect required by NEC 690. | | | |
| Compliance | CA Rule 21 (UL 1741-SA) UL 62109-1, UL1741/IEEE1547, FCC Part 15 Class B, ICES-0003 Class B, CAN/CSA-C22.2 NO. 107.1-01 This product is UL Listed as PV Rapid Shut Down Equipment and conforms with NEC-2014 and NEC-2017 section 690.12 and C22.1-2015 Rule 64-218 Rapid Shutdown of PV Systems, for AC and DC conductors, when installed according manufacturer's instructions. | | | |

1. No enforced DC/AC ratio. See the compatibility calculator at <https://enphase.com/en-us/support/module-compatibility>.

2. Nominal voltage range can be extended beyond nominal if required by the utility.

3. Limits may vary. Refer to local requirements to define the number of microinverters per branch in your area.

To learn more about Enphase offerings, visit enphase.com

