Wireless Gateway and Repeater

for North America

SE-WFGW-B-S1-NA
SE-WFRPT-B-S1-NA

5 YEAR WARRANTY

COMMUNICATION

Simple Wireless Connectivity

- Wirelessly connects SetApp-enabled SolarEdge inverters to an Internet router
- Easy installation and configuration via SetApp, leveraging a Wireless station built into the inverter
- Antenna is located external to the inverter and supports up to two repeaters for extended range
- The Wireless Gateway supports up to eight SolarEdge inverters on a single wireless network

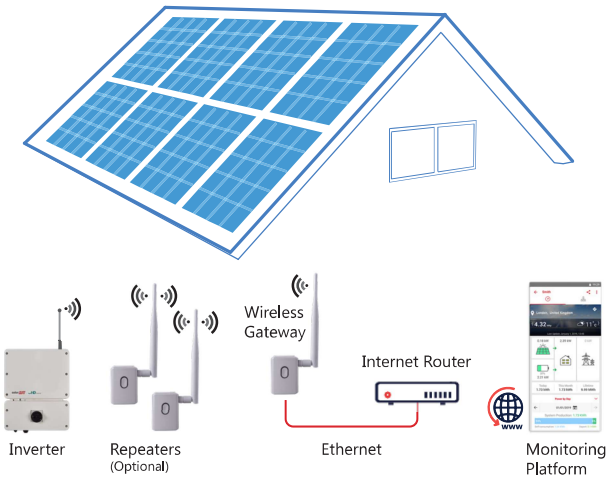

solaredge

/ Wireless Gateway and Repeater

for North America

Model: WiFi-GW

SE-WFGW-B-S1-NA, SE-WFRPT-B-S1-NA

COMPATIBLE INVERTERS	SEXXXX-XXXXXBXX4 (INVERTERS WITH SETAPP CONFIGURATION)	UNITS
RF PERFORMANCE		
Transmit Power (Max)	19.5	dBm
Receiver Sensitivity (802.11b @ 1Mbps DSS)	-94 to -69	dBm
EIRP with Antenna	24.5	dBm
Outdoor (LOS) Range	400 / 1300	m / ft
Indoor Range(1)	50 / 160	m / ft
Frequency Band	2412 - 2462	MHz
Bandwidth	20	MHz
Antenna Gain(2)	5	dBi
NETWORK AND SECURITY		
Channels	1-11	
Security	WPA-PSK, WPA2-PSK, WEP	
WIRELESS LAN		
Standards	802.11b/g/n	
Modulation	802.11b - DSSS-CCK, 802.11g - OFDM, 802.11n - HT modulations, MCS0-7	
Data Rates	1 - 72	Mbps
ENVIRONMENTAL		
Operating Temperature	-20 to +60 / -4 to +140	°C / °F
Storage Temperature	-20 to +60 / -4 to +140	°C / °F
Relative Humidity (non-condensing)	0 - 80	%
Ingress Protection	IP20	
MECHANICAL		
Dimensions (HxWxD; with pins)	66.3 x 48 x 63 / 2.6 x 1.8 x 2.5	mm / inch
Weight without Antenna	90 / 0.20	gr / lb
Weight with Antenna	110 / 0.24	gr / lb
POWER SUPPLY		
AC Voltage (nominal)	100-240	Vac
AC Frequency (nominal)	50/60	Hz
Max Input Current	50	mA
STANDARD COMPLIANCE		
Safety	UL62368-1:2014 Ed.2; CSA-C22.2 No. 62368-1:2014 Ed.2	
EMC	CFR 47 FCC Part 15, Subpart B; Canada ICES-003, Issue 6; ANSI C63.10:2013	
AC Plug	NEMA 1-15P (two-pole, no ground)	

(1) Approximate values, may differ depending on specific installation conditions

(2) The antenna may have higher gain within EIRP power constraint

Wireless Gateway and Repeater

for North America

Model: WiFi-GW

SE-WFGW-B-S1-NA, SE-WFRPT-B-S1-NA

Scenario A: Single inverter, wireless connection with optional repeaters

- 1 x Wireless gateway
- 1 or 2 x Wireless repeater for extending the Wi-Fi range

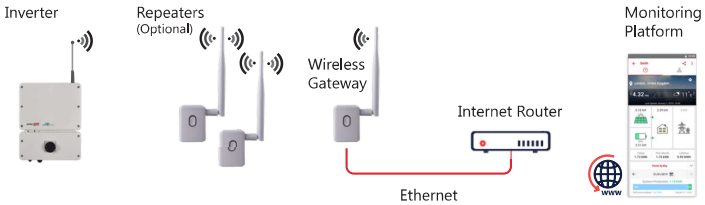

Scenario B: Multiple inverters, wired connection(3)

- 1 x Wireless gateway

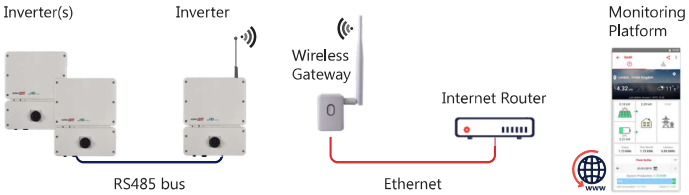

Scenario C: Multiple inverters, Wi-Fi Point to Multi-point(3)

- 1 x Wireless gateway

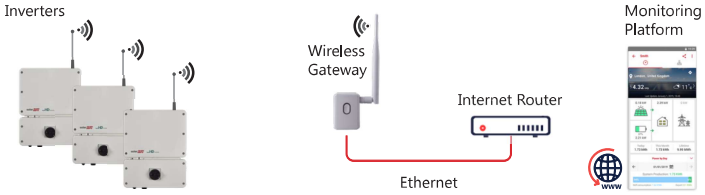

(3) To extend the Wi-Fi range, add one or two Wireless repeaters

CE

© SolarEdge Technologies, Ltd. All rights reserved. SOLAREDGE, the SolarEdge logo, OPTIMIZED BY SOLAREDGE are trademarks or registered trademarks of SolarEdge Technologies, Inc. All other trademarks mentioned herein are trademarks of their respective owners. Date: 06/2020/V01/ENG NA. Subject to change without notice.

solaredge