

**CLEAN, SAFE, RELIABLE
SOLAR ENERGY FROM DASOL**

APPLICATIONS

- Microwave/Radio repeater stations.
- Electrification of villages in remote areas.
- Medical facilities in rural areas.
- Power source for summer vacation homes.
- Emergency communication systems.
- Water quality and environment data monitoring systems.
- etc.



Easy installation and handling for various applications.



Tempered glass, EVA lamination and weatherproof backskin provide long-life and enhanced cell performance.



Independently certified by international certification body(TUV,CSA,CE).



Manufactured according to International Quality and Environment Management System(ISO9001).



The A18 series offers industry-leading performance for a variety application.

DASOL

Anji DASOL Solar Energy S&T Co.,Ltd.
The Health Industrial Park, Anji, Zhejiang 313300, China
www.dasol.cn

DS-A18-135

ELECTRICAL CHARACTERISTICS

Maximum power(Pmax) ¹	135W
Tolerance of Pmax	±5%
Open circuit voltage(Voc)	22.3V
Maximum power voltage(Vmp)	18.0V
Short circuit current(Isc)	8.18A
Maximum power current(Imp)	7.50A
Series fuse rating	12A
Maximum system(DC) voltage	600V


MECHANICAL CHARACTERISTICS

Dimensions	1440×665×35mm/56.69×26.18×1.38in
Weight	11.2kg/24.7lbs


TEMPERATURE COEFFICIENTS

Operation temperature range	-40°C-85°C
NOCT	48±3°C
Temperature coefficients of Isc	+0.084%/°C
Temperature coefficients of Voc	-0.39%/°C

IV CURVES

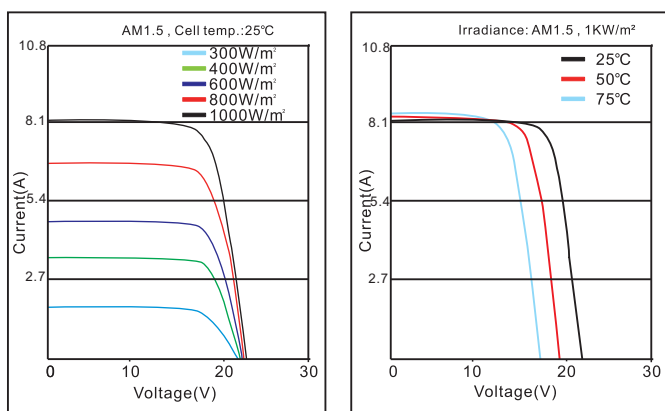

DIMENSIONS

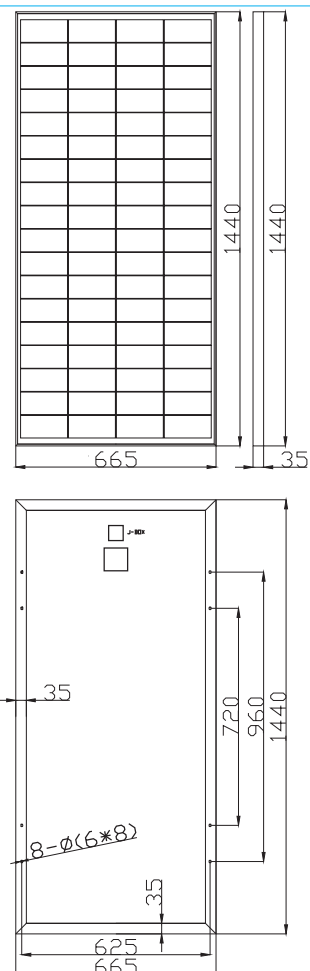

CERTIFICATIONS



¹(STC) Standard Test Conditions: 25°C, 1kW/m², AM1.5

Blue Pacific Solar



www.BluePacificSolar.com



DASOL

Anji DASOL Solar Energy S&T Co., Ltd.
The Health Industrial Park, Anji, Zhejiang 313300, China
www.dasol.cn