

- ➤ Fully Pre-Wired System
- > Simplified Installation
- ➤ Field Configurable Settings
- Optimized System Footprint
- ➤ Ample AC and DC Breaker Provisions
- Factory Tested

## The FLEXpower TWO System is ideal for applications with medium-sized power requirements such as larger homes and light commercial or back-up power systems.

With its compact design and easy-to-install mounting system, FLEXpower TWO can be mounted in either horizontal or vertical orientation to allow installation in more space-limited locations. FLEXpower TWO includes two inverter/chargers, AC and DC wiring boxes, a MATE3, HUB, and Surge Protector with optional kits for charge controllers and DC system monitoring, while maintaining a small system footprint.

The FLEXpower TWO System is also equipped with battery breakers, an Input-Output-Bypass Assembly, mounting locations for GFCI Type B style AC outlets and locations for additional AC breakers.


Both FLEXpower systems' components carry all of the necessary ETL certifications for a code-compliant installation that not only saves time and money, but also retains a fully-customized look.

## **FLEXpower TWO** Specifications\*

For 120/240VAC/60Hz Applications	Description	Inverter(s)	FW-X240	Bypass	Outlet	Inverter OCPD	PV OCPD	RTS
FP2 VFX3648	Dual VFX3648 7.2kW FLEXpower TWO	VFX3648 (x2)	Yes	240VAC Bypass	N/A	175A	80A	Yes
FP2 VFX3524	Dual VFX3524 7kW FLEXpower TWO	VFX3524 (x2)	Yes	240VAC Bypass	N/A	250A	80A	Yes
FP2 GTFX3048	Dual GTFX3048 6kW FLEXpower TWO	GTFX3048 (x2)	_	240VAC Bypass	N/A	175A	80A	Yes
FP2 GVFX3524	Dual GVFX35247kW FLEXpowerTWO	GVFX3524 (x2)	_	240VAC Bypass	N/A	250A	80A	Yes
FP2 GVFX3648	Dual GVFX3648 7.2kW FLEXpower TWO	GVFX3648 (x2)	_	240VAC Bypass	N/A	175A	80A	Yes
FP2 FX3048T	Dual FX3048T 6kW FLEXpowerTWO	FX3048T (x2)	Yes	240VAC Bypass	N/A	175A	80A	Yes
FP2 FX2524T	Dual FX2524T 5kW FLEXpowerTWO	FX2524T (x2)	_	240VAC Bypass	N/A	175A	80A	Yes
FP2 GTFX3048-HI	Dual GTFX3048-HI 6kW FLEXpower TWO for Hawaii	GTFX3048-HI (x2)	_	240VAC Bypass	N/A	175A	80A	Yes
FP2 GTFX2524-HI	Dual GTFX2524-HI 6kW FLEXpower TWO for Hawaii	GTFX2524-HI (x2)	_	240VAC Bypass	N/A	175A	80A	Yes

For 230VAC/50Hz Applications	Description	Inverter(s)	FW-X240	Bypass	Outlet	Inverter OCPD	PV OCPD	RTS
FP2 VFX3048E	Dual VFX3048E 6kW FLEXpower TWO	VFX3048E (x2)	_	230VAC Bypass	N/A	175A	80A	Yes
FP2 VFX3024E	Dual VFX3024E 6kW FLEXpower TWO	VFX3024E (x2)	_	230VAC Bypass	N/A	250A	80A	Yes

<sup>\*</sup>All pre-wired systems include (2) FLEXMax 80 charge controllers, MATE3 system display and communications, FLEXnet DC, FW-SP-ACA, GDFI and HUB10 communications. Individual FLEXpower TWO components carry all necessary ETL certifications. Additional configurations available.

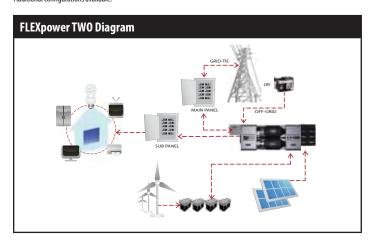





Europe Tel: +1 360.435.6030 Tel: +1 561.792.9651 Tel: +49 9122.79889.0 Tel: +852 2736.8663 Fax: +1 360.435.6019 Fax: +1 561.792.7157 Fax: +49 9122.79889.21 Fax: +852 2199.7988



