



KD 200-60 F Series

KD240GX-LFB KD245GX-LFB

CUTTING EDGE TECHNOLOGY

As a pioneer with over 35 years in the solar energy industry, Kyocera demonstrates leadership in the development of solar energy products. Kyocera's *Kaizen* Philosophy, commitment to continuous improvement, is shown by repeatedly achieving world record cell efficiencies.

QUALITY BUILT IN

- UV stabilized, aesthetically pleasing black anodized frame
- Supported by major mounting structure manufacturers
- Easily accessible grounding points on all four corners for fast installation
- Proven junction box technology with 12 AWG PV wire to work with transformerless inverters
- Quality locking MC4 plug-in connectors to provide safe and quick connections

RELIABLE

- Proven superior field performance
- Tight power tolerance
- Only module manufacturer to pass rigorous long-term testing performed by TÜV Rheinland



QUALIFICATIONS AND CERTIFICATIONS

UL Listing
QIGU.E173074



Registered to ISO9001-2000

NEC 2008 Compliant, UL 1703, ISO 9001, and ISO 14001
UL1703 Certified and Registered, UL Fire Safety Class C, CEC, FSEC



QUALIFIED FOR "BUY AMERICAN"
Manufactured in San Diego, California

- Available Upon Request •



ELECTRICAL SPECIFICATIONS


Standard Test Conditions (STC) <i>STC = 1000 W/M² irradiance, 25°C module temperature, AM 1.5 spectrum*</i>			
	KD240GX-LFB	KD245GX-LFB	
P _{mp}	240	245	W
V _{mp}	29.8	29.8	V
I _{mp}	8.06	8.23	A
V _{oc}	36.9	36.9	V
I _{sc}	8.59	8.91	A
P _{tolerance}	+5/-0	+5/-0	%

Nominal Operating Cell Temperature Conditions (NOCT) <i>NOCT = 800 W/M² irradiance, 20°C ambient temperature, AM 1.5 spectrum*</i>			
T _{NOCT}	45	45	°C
P _{max}	172	176	W
V _{mp}	26.7	26.8	V
I _{mp}	6.45	6.58	A
V _{oc}	33.7	33.7	V
I _{sc}	6.95	7.21	A
PTC	217.3	219.1	W

Temperature Coefficients			
P _{max}	-0.46	-0.46	%/°C
V _{mp}	-0.52	-0.52	%/°C
I _{mp}	0.0064	0.0065	%/°C
V _{oc}	-0.36	-0.36	%/°C
I _{sc}	0.060	0.060	%/°C
Operating Temp	-40 to +90	-40 to +90	°C

System Design	
Series Fuse Rating	15 A
Maximum DC System Voltage (UL)	600 V
Hailstone Impact	1 in (25mm) @ 51mph (23m/s)

* Subject to simulator measurement uncertainty of +/- 3%. KYOCERA reserves the right to modify these specifications without notice.




MODULE CHARACTERISTICS

Dimensions: <i>length/width/height</i>	65.43in/38.98in/1.8in (1662mm/990mm/46mm)
Weight:	46.3lbs (21.0kg)

PACKAGING SPECIFICATIONS

Modules per pallet:	20
Pallets per 53' container:	36
Pallet box dimensions: <i>length/width/height</i>	66in/40in/47in (1675mm/1005mm/1175mm)
Pallet box weight:	1040 lbs (470kg)

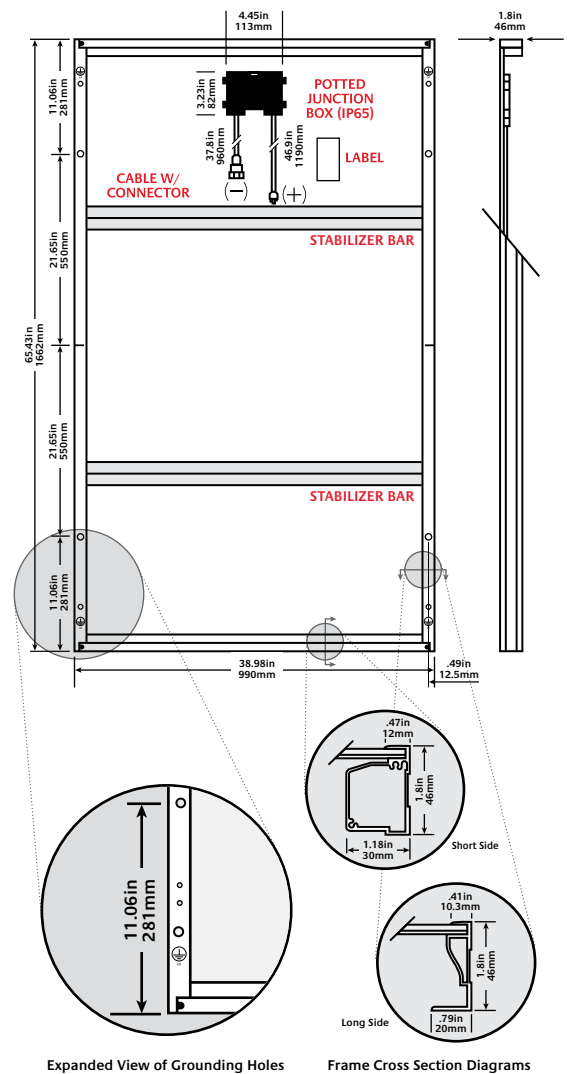

Legend	
○ MOUNTING HOLES .35in (9mm)	● DRAINAGE HOLES .35in (9mm)