



NEW! 25-YEAR LINEAR
PERFORMANCE GUARANTEE
AND 5-YEAR EXTENDED
PRODUCT WARRANTY*

Length 65.94 in (1675 mm)
Width 39.41 in (1001 mm)
Height 1.22 in (31 mm)
Weight 46.7 lbs (21.2 kg)
Frame Aluminum

Sunmodule⁺

SW 245 MONO



World-class quality

SolarWorld products are manufactured in state-of-the-art factories according to strict German and US quality standards.

Award-winning products

SolarWorld modules have been ranked number one for two years running in ongoing comparison tests carried out by the Photon trade magazine. Sunmodule plus panels generated up to 12% more yield than other major brand panels.

SolarWorld Plus-Sorting

Plus-Sorting guarantees the highest efficiency of the installation. SolarWorld only delivers modules that have greater than or equal to the nameplate rated power.

25-year Linear Performance Guarantee*

SolarWorld guarantees, over 25 years, that the modules' performance will not decrease by more than 0.7% per year – a distinct added value compared to industry-standard two-tiered guarantees.

*according to the SolarWorld service certificate valid at the time of purchase
www.solarworld-global.com/service-certificate



We turn sunlight into power.

Sunmodule⁺

SW 245 MONO

PERFORMANCE UNDER STANDARD TEST CONDITIONS (STC*)

SW 245		
Maximum power	P_{max}	245 Wp
Open circuit voltage	V_{oc}	37.7 V
Maximum power point voltage	V_{mpp}	30.8 V
Short-circuit current	I_{sc}	8.25 A
Maximum power point current	I_{mpp}	7.96 A

*STC: 1000W/m², 25°C, AM 1.5

PERFORMANCE AT 800 W/M², NOCT, AM 1.5

SW 245		
Maximum power	P_{max}	179 Wp
Open circuit voltage	V_{oc}	34.4 V
Maximum power point voltage	V_{mpp}	28.1 V
Short-circuit current	I_{sc}	6.65 A
Maximum power point current	I_{mpp}	6.37 A

Minor reduction in efficiency under partial load conditions at 25°C: at 220 W/m², 95% (+/-3%) of the STC efficiency (1000 W/m²) is achieved.

COMPONENT MATERIALS

Cells per module	60
Cell type	Monocrystalline Silicon
Cell dimensions	156 mm x 156 mm
Front	tempered glass (EN12150)

SYSTEM INTEGRATION PARAMETERS


Maximum system voltage SC II	1000 V
Maximum system voltage USA NEC	600 V
Maximum reverse current	16 A
Increased snowload acc. to IEC 61215	5.4 kN/m ²

THERMAL CHARACTERISTICS

NOCT	47 °C
TC I_{sc}	0.042 %/°C
TC V_{oc}	-0.33 %/°C
TC P_{mpp}	-0.45 %/°C

ADDITIONAL DATA

Power tolerance ¹	+/- 3 %
SolarWorld Plus-Sorting ¹	$P_{Flash} \geq P_{max}$
Junction box	IP65
Connector	MC4
PTC rating	219.6 W
Module efficiency	14.6 %

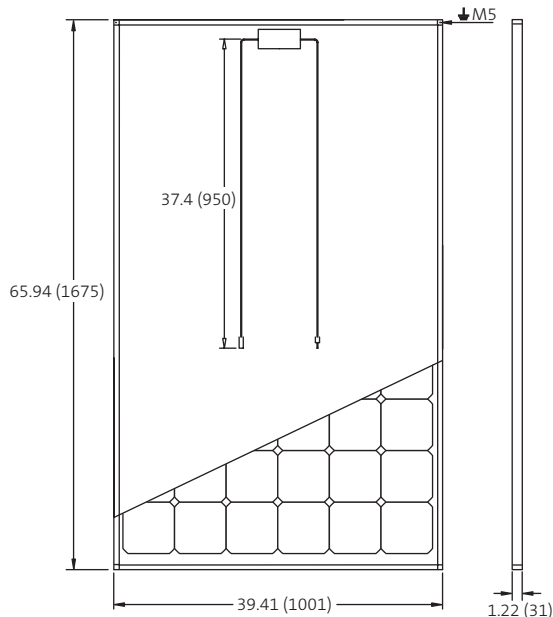

- Qualified, IEC 61215
- Safety tested, IEC 61730
- Periodic Inspection



CORROSIVE GAS (NH₃) RESISTANT



1) The output identified by SolarWorld (P_{Flash}) is always higher than the nominal output (P_{max}) of the module.

SolarWorld AG reserves the right to make specification changes without notice. This data sheet complies with the requirements of EN 50380. Sunmodule panels are manufactured in ISO 9001:2000 certified facilities