

## SPECIFICATIONS

CELL	Multicrystalline silicon solar cell 156mmx39mm
No. of cells and connections	36(4x9)
Dimension of module	666x412x25(mm) 26.2x16.2x0.98(in )
Weight	3.5kg 7.71lb

## Characteristics

Model	SPM030P
Power at STC(Pm)	30W
Maximum power voltage(Vpm)	17.3V
Maximum power current(Ipm)	1.77A
Open circuit voltage(Voc)	21.9V
Short circuit current(Isc)	1.93A
Tolerance	±5%

STC: Temperature 25°C, Irradiance 1000W/m<sup>2</sup>, AM=1.5

## Limits


Operating temperature	-40 to +85°C
Maximum system voltage	600V DC
Series fuse rating	10A

## Components & Mechanical Data


Front Glass	3.2mm tempered
Junction Box	IP-65 rated
Frame	Anodized aluminum alloy type 6063-T5
Encapsulation Material	EVA(0.5±0.05mm thickness)
Back Foil	White TPT(0.32±0.03mm thickness)
Temperature Range	-40°C to +90°C
Max Load	5400Pa

## Temperature coefficient

Nominal Operation Cell Temperature	48°C±2°C
Current temperature coefficient	0.06±0.01 %/K
Voltage temperature coefficient	- (78±10) mv/k
Power temperature coefficient	- (0.5±0.05) %/k

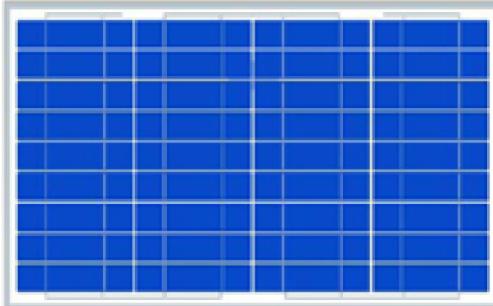

Back of the module

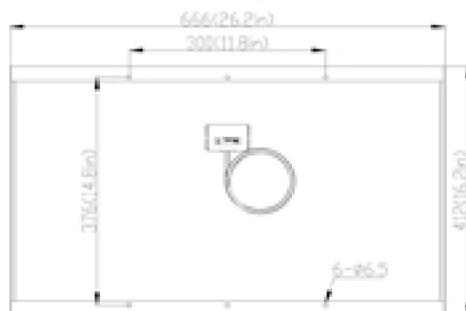

25  
Section A-A'

25  
25  
25  
Section B-B'

