



- MODEL:** L16RE-A with Bayonet Cap
- DIMENSIONS:** inches (mm)
- BATTERY:** Flooded/wet lead-acid battery
- COLOR:** Maroon (case/cover)
- MATERIAL:** Polypropylene

PRODUCT SPECIFICATION

| BCI GROUP SIZE | TYPE | CAPACITY ^A Amp-Hours (AH) | | | | | | | | ENERGY (kWh) | VOLTAGE | TERMINAL Type | DIMENSIONS ^B Inches (mm) | | | WEIGHT lbs. (kg) |
|--|----------|--------------------------------------|-----------|------------|------------|------------|------------|-------------|-------------|--------------|---------|---------------|-------------------------------------|----------------|---------------------|------------------|
| | | 2-Hr Rate | 5-Hr Rate | 10-Hr Rate | 20-Hr Rate | 48-Hr Rate | 72-Hr Rate | 100-Hr Rate | 100-Hr Rate | | | | Length | Width | Height ^C | |
| PREMIUM LINE - DEEP-CYCLE FLOODED BATTERIES | | | | | | | | | | | | | | | | |
| 903 | L16RE-A* | 211 | 267 | 299 | 325 | 346 | 354 | 360 | 2.16 | 6VOLT | 5 | 11-5/8 (295) | 7 (178) | 17-11/16 (450) | 115 (52) | |

CHARGING INSTRUCTIONS

| CHARGER VOLTAGE SETTINGS (AT 77°F/25°C) | |
|---|------------------|
| | Voltage per cell |
| Absorption charge | 2.35-2.45 |
| Float charge | 2.20 |
| Equalize charge | 2.58 |

Do not install or charge batteries in a sealed or non-ventilated compartment. Constant under or overcharging will damage the battery and shorten its life as with any battery.

OPERATIONAL DATA

| OPERATING TEMPERATURE | SELF DISCHARGE | SPECIFIC GRAVITY |
|---|-------------------|---|
| -4°F to 113°F (-20°C to +45°C). At temperatures below 32°F (0°C) maintain a state of charge greater than 60%. | Up to 4% per week | The specific gravity at 100% state-of-charge is 1.280 |

CHARGING TEMPERATURE COMPENSATION

To the Voltage Reading -- Subtract 0.005 volt per cell (VPC) for every 1°C above 25°C or add 0.005 volt per cell for every 1°C below 25°C.

EXPECTED LIFE VS. TEMPERATURE

Chemical reactions internal to the battery are driven by voltage and temperature. The higher the battery temperature, the faster chemical reactions will occur. While higher temperatures can provide improved discharge performance the increased rate of chemical reactions will result in a corresponding loss of battery life. As a rule of thumb, for every 10°C increase in temperature the reaction rate doubles. Thus, a month of operation at 35°C is equivalent in battery life to two months at 25°C. Heat is an enemy of all lead acid batteries, FLA, AGM and gel alike and even small increases in temperature will have a major influence on battery life.

A. The amount of amp-hours (AH) a battery can deliver when discharged at a constant rate at 80°F (27°C) for Premium Line and maintain a voltage above 1.75 V/cell. Capacities are based on peak performance.

B. Dimensions are based on nominal size. Dimensions may vary depending on type of handle or terminal. Batteries to be mounted with .5 inches (12.7 mm) spacing minimum.

C. Dimensions taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.

Trojan's battery testing procedures adhere to both BCI and IEC test standards.

TERMINAL CONFIGURATIONS

| 5 LT | L-Terminal |
|---|--|
|  | Terminal Height Inches (mm) 1-3/4 (43) Torque Values in-lb (Nm) 100 – 120 (11 – 14) Through-hole Diameter (mm) 3/8 (10) |

* Polygon™ Case




L16RE-A DATA SHEET


for Renewable Energy and Backup Power Applications

PREMIUM LINE


BATTERY DIMENSIONS (shown with LT)

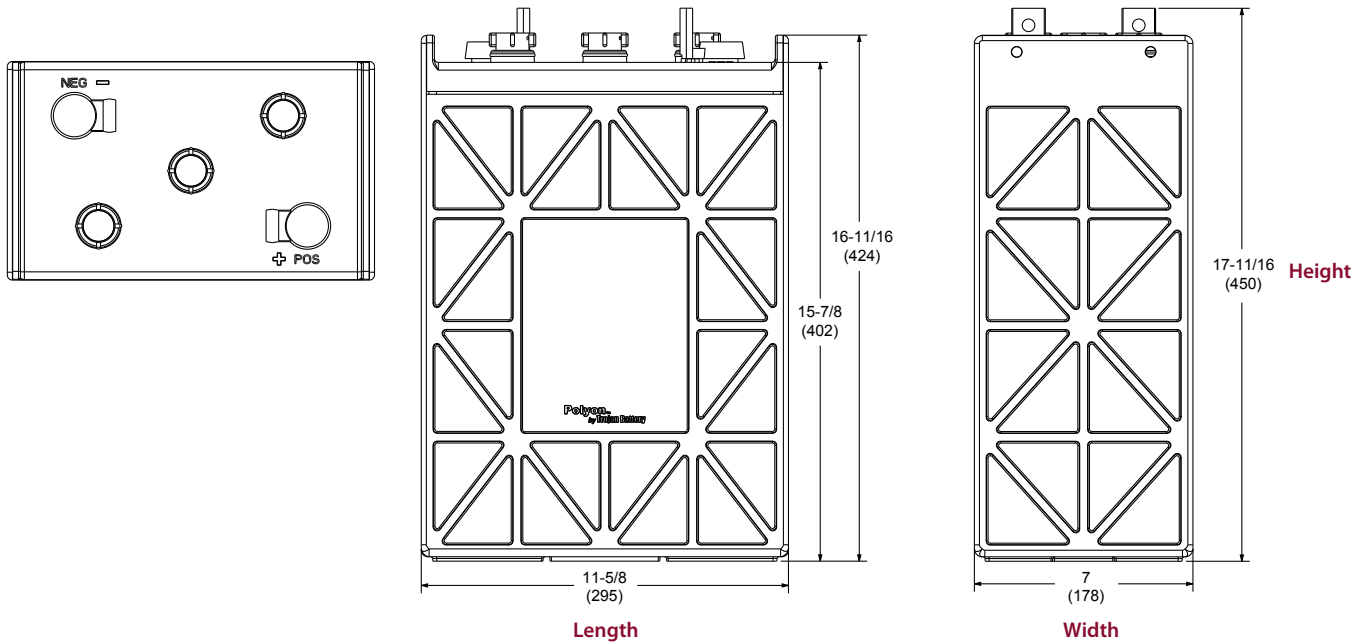

TYPICAL CYCLE LIFE IN A STATIONARY APPLICATION

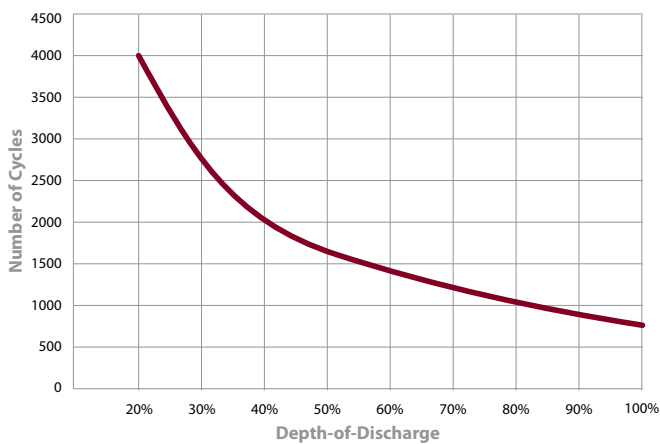

PERCENT CAPACITY VS. TEMPERATURE

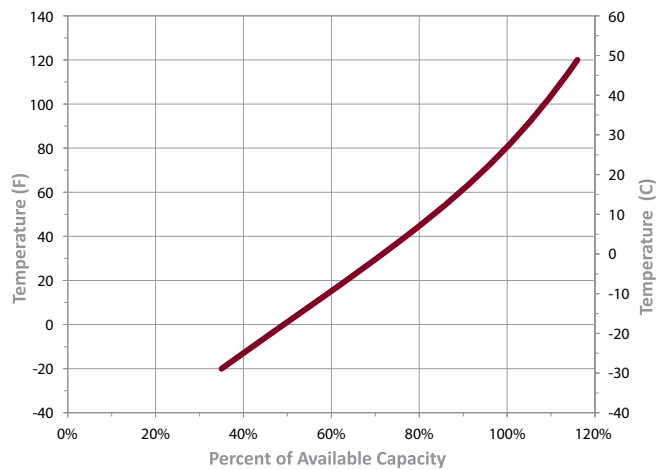

Trojan batteries are available worldwide.

We offer outstanding technical support, provided by full-time application engineers.

call 800.423.6569 or + 1.562.236.3000 or visit www.trojanbatteryRE.com

12380 Clark Street, Santa Fe Springs, CA 90670 • USA or email re@trojanbattery.com