

The **Coolest** Thermal System Money Can Buy


FHW TS150L



Technical Data	FHW TS150L
Overall Area (sqft)	30
Aperture Area (sqft)	27.3
LXWXH (Ft)	6.5X4.7X1.44
Weight (Lbs)	132.2
Tank Capacity (Gallon)	39.5
Housing	Deep Drawn Aluminum Tray
Surface	Anodized Aluminum
Absorber	PVD Selective coating on Al
Absorption (%)	95
Emission (%)	5
Ø Manifold	3/4
Connections	Bare / Union with Gasket
PMMA Transmission (%)	98.0%
Max Stagnation Temperature (F)	392
Max Operating Pressure (PSI)	116
Heat Transfer Medium	Water
Installation Angle	20°

Benefits

- High Performance integrated Thermal Collector and tank designed to maximize energy conversion into usable heat
- Designed for domestic hot water
- Innovative **Plug-and-Play** design
- Maintenance Free
- Esthetically pleasing, the FHW TS150L was developed for performance, longevity and easy installation

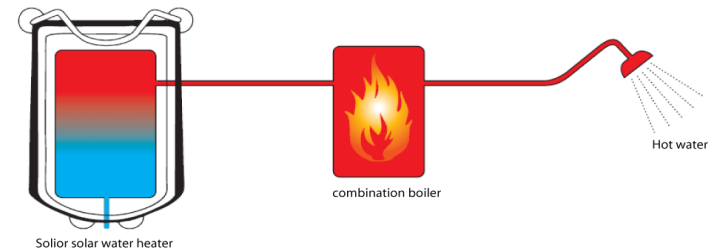

Features

- An intelligent design allows the system to operate all year round
- Plumbing included for a true **Plug-and-Play** installation
- Built in Anti Freeze protection
- Highly selective absorbent coating
- Integrated mounting structure
- 10 years limited warranty

