


HIGH PERFORMANCE SOLAR MODULES

REC PEAK ENERGY SERIES

REC Peak Energy Series modules are the perfect choice for building solar systems that combine long lasting product quality with reliable power output. REC combines high quality design and manufacturing standards to produce high-performance solar modules with uncompromising quality.



**MORE POWER
PER M²**



**ROBUST AND
DURABLE DESIGN**




**ENERGY PAYBACK
TIME OF ONE YEAR**



**OPTIMIZED FOR ALL
SUNLIGHT CONDITIONS**

REC PEAK ENERGY SERIES

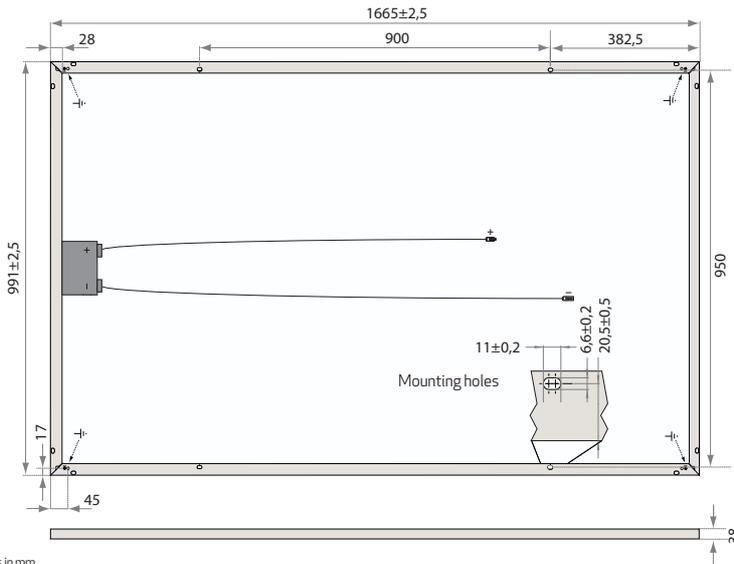

Measurements in mm.

ELECTRICAL DATA @ STC	REC240PE	REC245PE	REC250PE	REC255PE	REC260PE	REC265PE
Nominal Power - P_{MPP} (Wp)	240	245	250	255	260	265
Watt Class Sorting - (W)	0/+5	0/+5	0/+5	0/+5	0/+5	0/+5
Nominal Power Voltage - V_{MPP} (V)	29.7	30.1	30.2	30.5	30.7	30.9
Nominal Power Current - I_{MPP} (A)	8.17	8.23	8.30	8.42	8.50	8.58
Open Circuit Voltage - V_{OC} (V)	36.8	37.1	37.4	37.6	37.8	38.1
Short Circuit Current - I_{SC} (A)	8.75	8.80	8.86	8.95	9.01	9.08
Module Efficiency (%)	14.5	14.8	15.1	15.5	15.8	16.1

Analysed data demonstrates that 99.7% of modules produced have current and voltage tolerance of $\pm 3\%$ from nominal values. Values at standard test conditions STC (airmass AM1.5, irradiance 1000 W/m², cell temperature 25°C). At low irradiance of 200 W/m² (AM1.5 and cell temperature 25°C) at least 97% of the STC module efficiency will be achieved.

ELECTRICAL DATA @ NOCT	REC240PE	REC245PE	REC250PE	REC255PE	REC260PE	REC265PE
Nominal Power - P_{MPP} (Wp)	183	187	189	193	197	202
Nominal Power Voltage - V_{MPP} (V)	27.7	28.1	28.3	28.5	29.0	29.4
Nominal Power Current - I_{MPP} (A)	6.58	6.64	6.68	6.77	6.81	6.90
Open Circuit Voltage - V_{OC} (V)	34.4	34.7	35.0	35.3	35.7	36.0
Short Circuit Current - I_{SC} (A)	7.03	7.08	7.12	7.21	7.24	7.30

Nominal operating cell temperature NOCT (800 W/m², AM1.5, windspeed 1 m/s, ambient temperature 20°C).

CERTIFICATIONS



IEC 61215 & IEC 61730, IEC 62716 (ammonia resistance) & IEC 61701 (salt mist - severity level 6).

WARRANTY

10 year product warranty
25 year linear power output warranty
(max. depression in performance of 0.7% p.a.)
See warranty conditions for further details.

16.1% EFFICIENCY
10 YEAR PRODUCT WARRANTY
25 YEAR LINEAR POWER OUTPUT WARRANTY

TEMPERATURE RATINGS

Nominal operating cell temperature (NOCT) 45.7°C ($\pm 2^\circ\text{C}$)
Temperature coefficient of P_{MPP} -0.40 %/°C
Temperature coefficient of V_{OC} -0.27 %/°C
Temperature coefficient of I_{SC} 0.024 %/°C

GENERAL DATA

Cell type: 60 REC PE multi-crystalline
3 strings of 20 cells with bypass diodes
Glass: 3.2 mm solar glass with anti-reflection surface treatment
Back sheet: Double layer highly resistant polyester
Frame: Anodized aluminum (silver)
Junction box: IP67 rated
4 mm² solar cable, 0.9 m + 1.2 m
Connectors: Multi-Contact MC4 (4 mm²)
Origin: Made in Singapore

MAXIMUM RATINGS

Operational temperature: -40 ... +85°C
Maximum system voltage: 1000 V
Maximum snow load: 550 kg/m² (5400 Pa)
Maximum wind load: 244 kg/m² (2400 Pa)
Max series fuse rating: 25 A
Max reverse current: 25 A

MECHANICAL DATA

Dimensions: 1665 x 991 x 38 mm
Area: 1.65 m²
Weight: 18 kg

Note! Specifications subject to change without notice.

REC is a leading global provider of solar energy solutions. With more than 15 years of experience, we offer sustainable, high performing products, services and investments for the solar industry. Together with our partners, we create value by providing solutions that better meet the world's growing energy needs. Founded in Norway, REC is listed on the Oslo Stock Exchange (ticker: RECSOL) and headquartered in Singapore. Our 1,500 employees worldwide generated revenues of NOK 4.1 billion in 2012.



www.recgroup.com

