



Sealed Lead-Acid Battery

Absorbant Glass Mat (AGM) technology for superior performance. Valve regulated, spill proof construction allows safe operation in any position. Approved for transport by air. D.O.T., I.A.T.A., F.A.A. and C.A.B. certified. U.L. recognized under file number MH 20567.

UPG No. 45966

UBGC2

Maintenance-Free

Specification

Nominal Voltage	6 volts		
Nominal Capacity	77° F (25° C)		
20-hr. (10.0A)	200 Ah		
10-hr. (? A)	? Ah		
5-hr. (? A)	? Ah		
1-hr. (? A)	? Ah		
Approximate Weight	0.53 lbs (0.2 kgs)		
Internal Resistance (approx.)	? mΩ		
Shelf Life (% of normal capacity at 77° F (25° C))			
3 Months	6 Months	12 Months	
91%	82%	64%	
Temperature Dependency of Capacity	(20 hour rate)		
104° F	77° F	32° F	5° F
102%	100%	85%	65%



Charge Method (Constant Voltage)


Cycle Use (Repeating Use)

Initial Current	30 A or smaller
Control Voltage	14.5 - 14.9 V

Float Use


Control Voltage	13.6 - 13.8 V
-----------------	---------------

Physical Dimensions: in (mm)




L: 10.24in (260 mm)
W: 7.09in (180 mm)
H: 9.72in (247 mm)
TH: 10.67in (271 mm)
 Tolerances are +/- 0.04 in. (+/- 1mm) and +/- 0.08 in. (+/- 2mm) for height dimensions. All data subject to change without notice.


Terminals




Discharge Time vs. Discharge Current

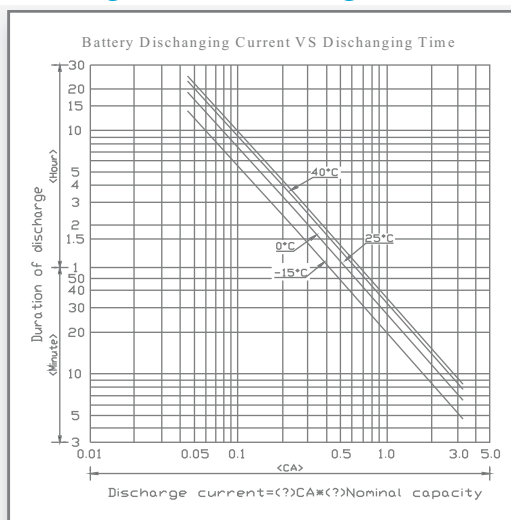


Discharge Characteristics

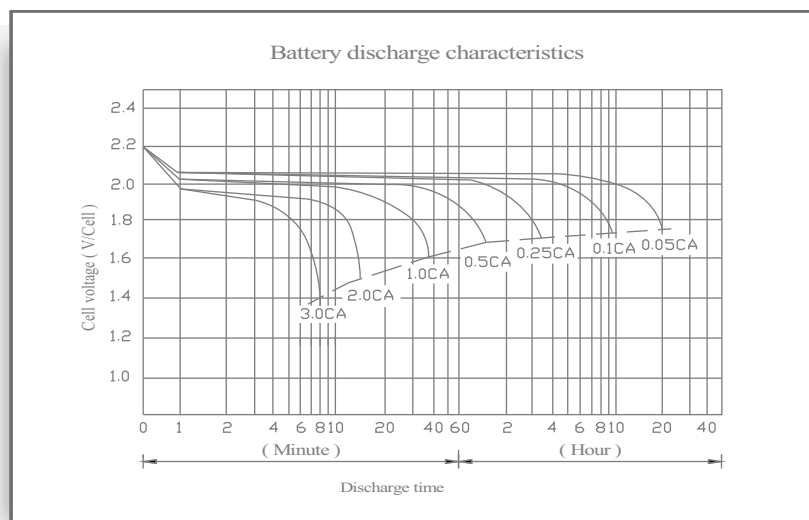


Battery Charging Characteristics for Cyclic Use

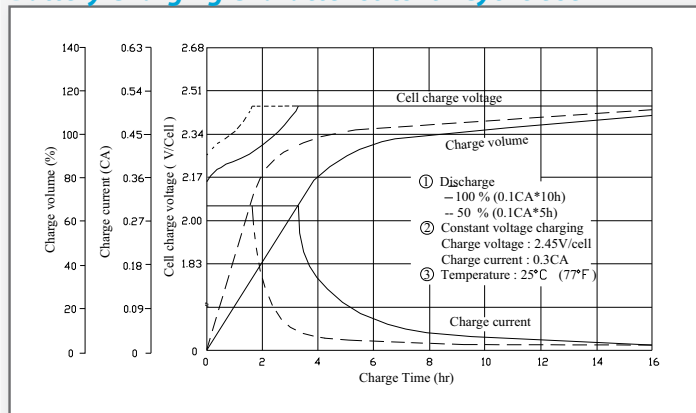


Battery Charging Characteristics for Standby Use

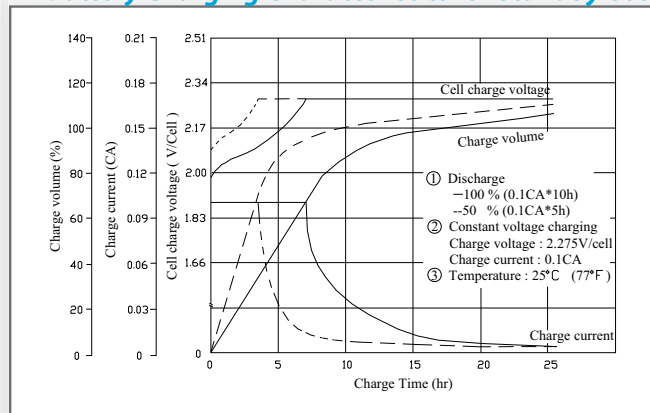


Shelf Life & Storage

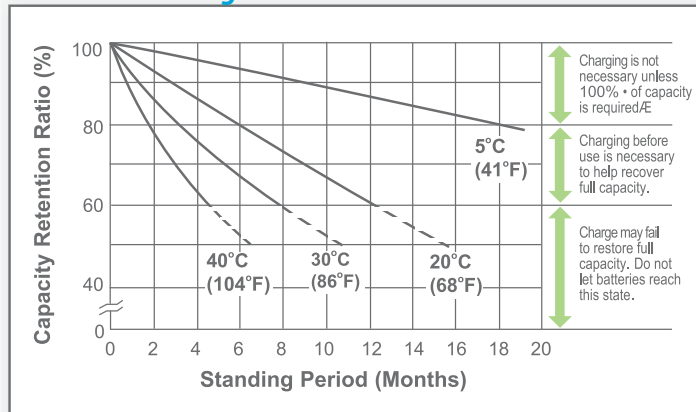


Cycle Life vs Depth of Discharge

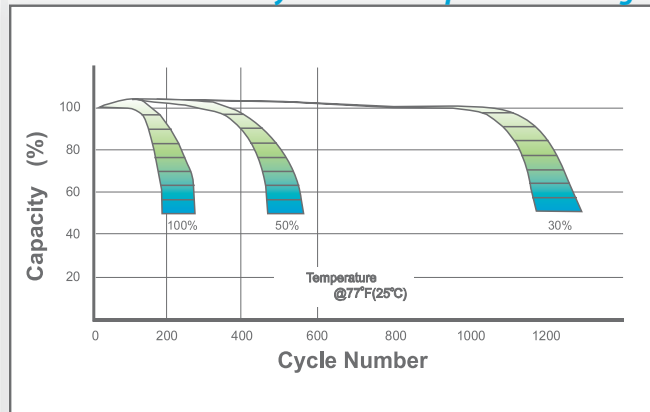

Open Circuit Voltage vs Residual Capacity

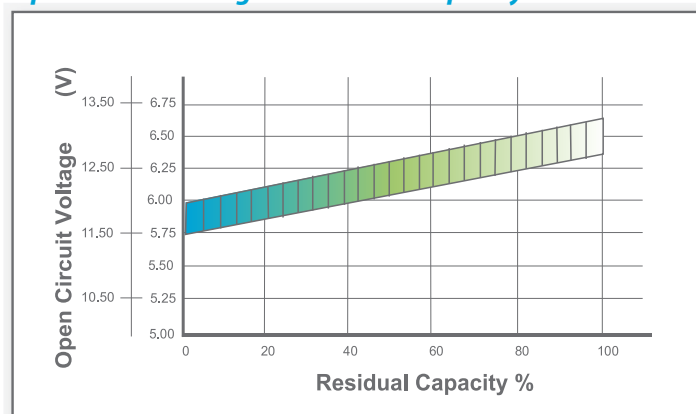

Effect of Temperature on Capacity

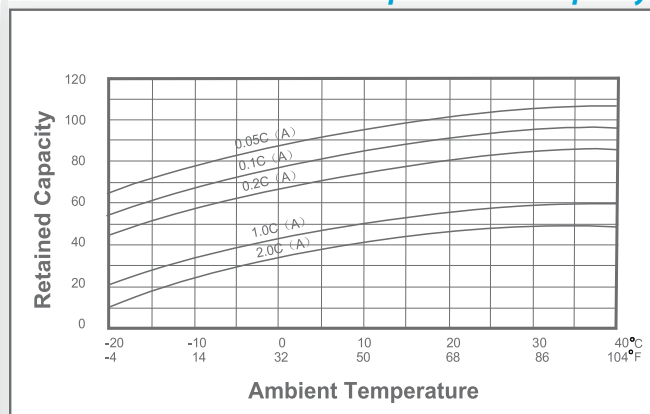

Charge Current & Final Discharge Voltage

Application	Charge Voltage(V/Cell)			Max.Charge Current	Final Discharge Voltage V/Cell	Discharge Current(A)	1.75	1.70	1.60	1.30
	Temperature	Set Point	Allowable Range							
Cycle Use	25°C(77°F)	2.45	2.40~2.50	0.35C	Discharge	0.2C>(A)	0.2C<(A)<0.5C	0.5C<(A)<1.0C	(A)>1.0C	
Standby	25°C(77°F)	2.325	2.30~2.35							



ISO 9001 :2008

Let UPG Power Your Life.

www.upgi.com